


Functional & Aesthetical Finishes

Finishes

The advantages of access flooring and underfloor service distribution are beneficial to a wide range of building applications - from office to educational, mission critical, casinos and beyond. Just like the buildings themselves, the spaces within them have varied and specific requirements, both functionally and aesthetically.

As with conventional flooring, the access floor finish options are limitless.


Selection of the many floor materials and finishes available




Cork



Wood Laminate

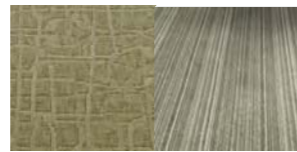


Carpet Tile

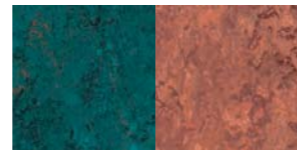


Linoleum




High Pressure Laminate

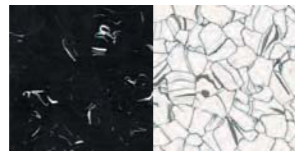


Static Control Vinyl

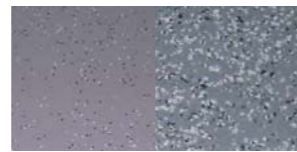


Rubber

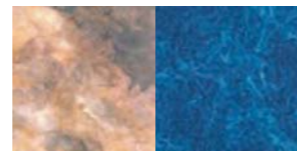

Luxury Vinyl

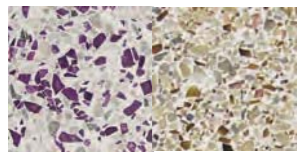


Terrazzo

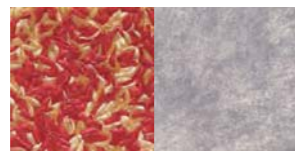

Freelay Hard Surfaces



Engineered Hardwood

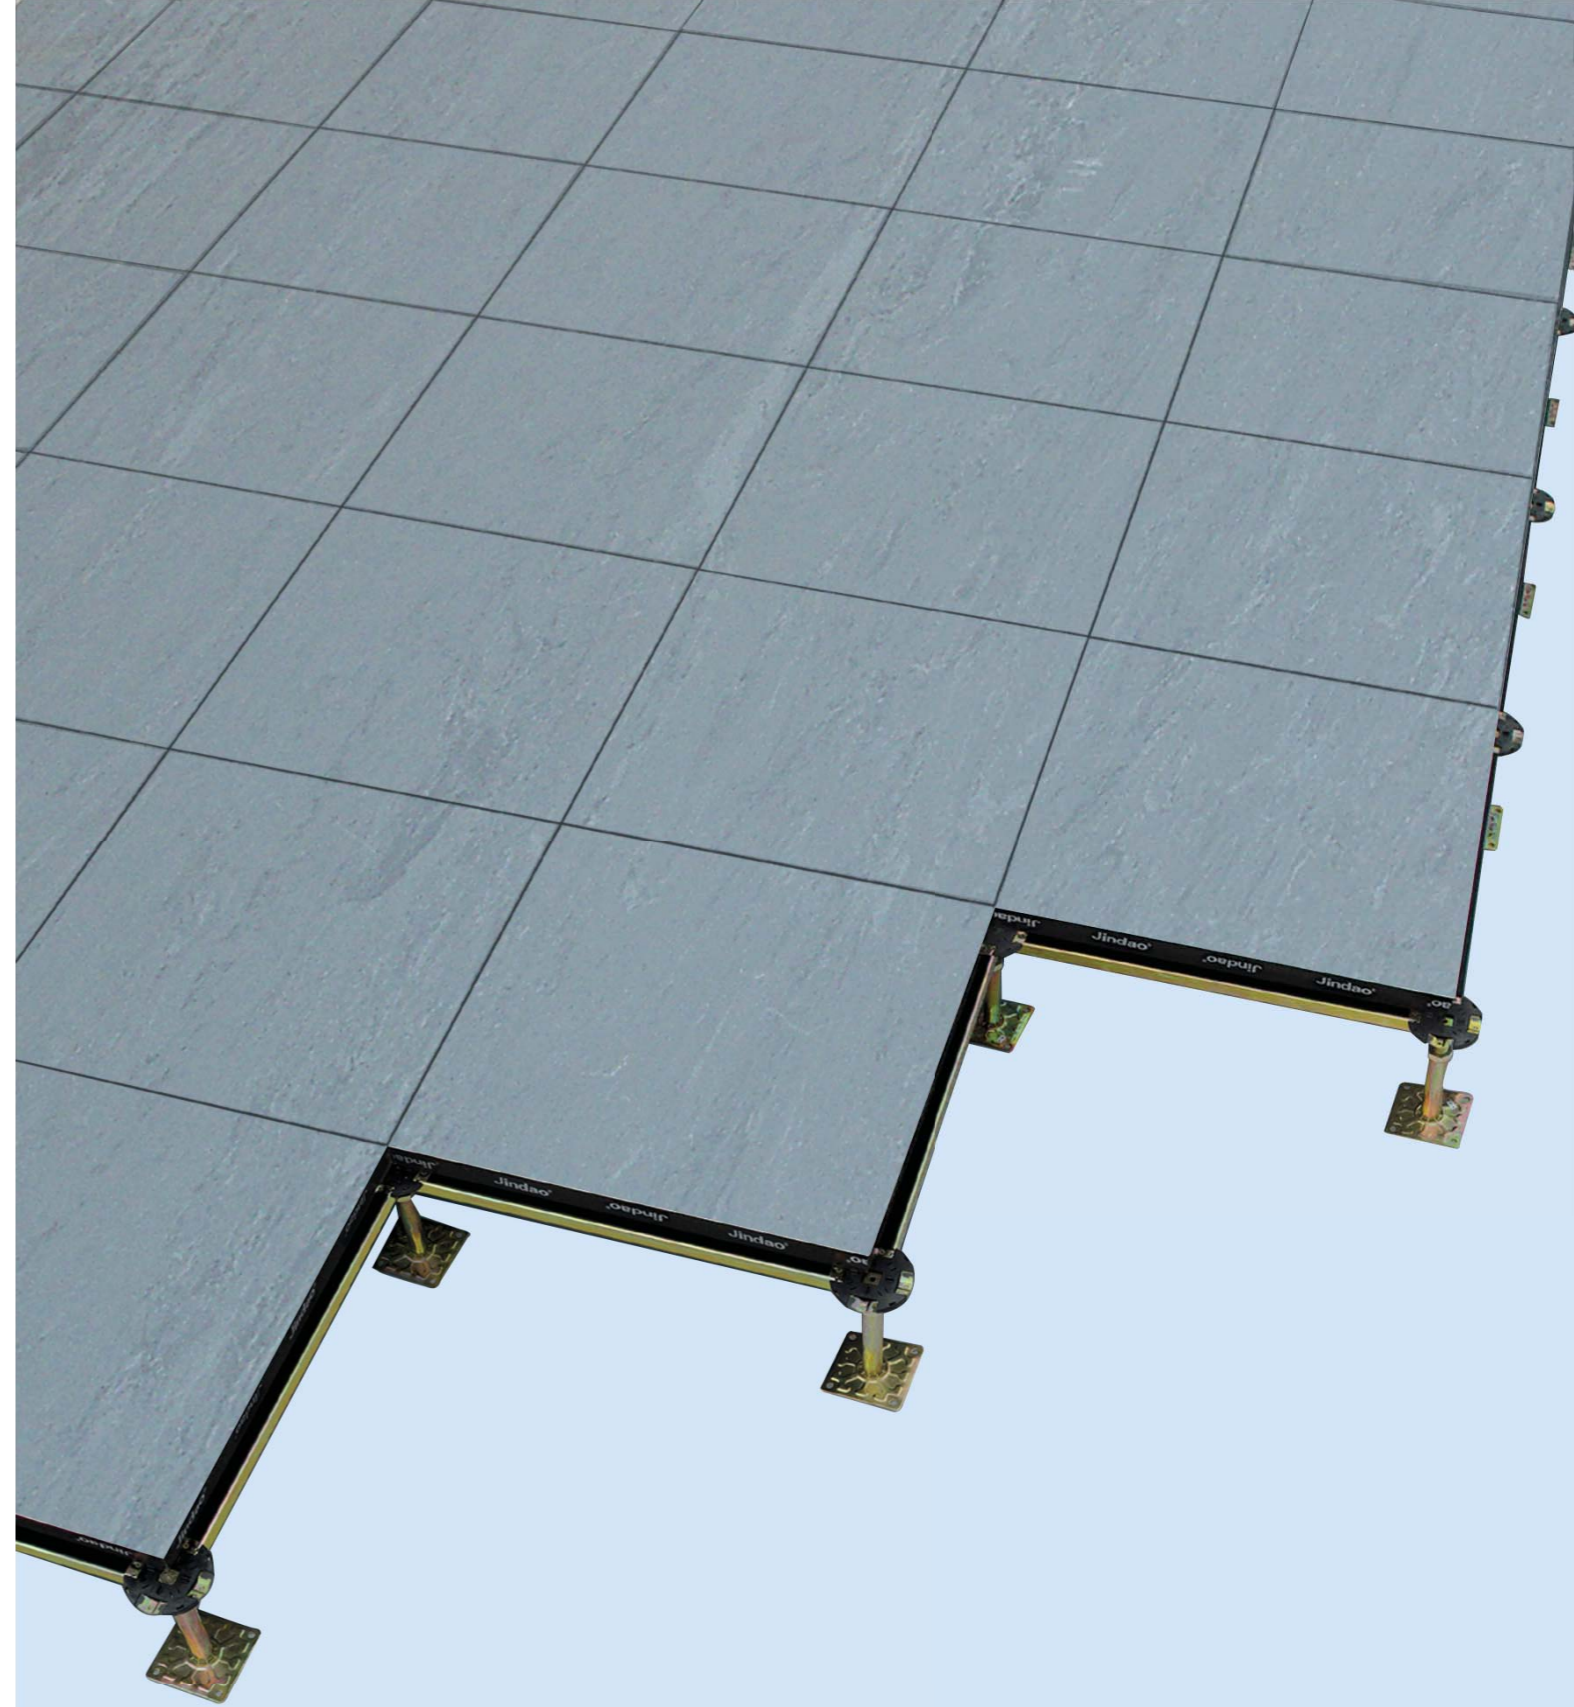

Jindao

14&&R77

Address: 1JX H LHP DU 3 X1 XD L V W & 0917H
 RRU6D DPXL J X 7D 6WU & DX LD DR - Tel+84-4-35121983

JINDAO RAISED ACCESS FLOOR SYSTEMS

CS System: Calcium Sulphate Panels & Understructures

HPL/Bare/Vinyl Finished CS Panel

CS System is modular system made of homogeneous high density calcium sulphate constituted of gypsum and vegetable organic fibres, with high physical-mechanical performance, excellent fire-resistance and high levels of sound-proofing.



HPL Finished CS Panel



Panel	Size	Loading Performance							
		Concentrated		Uniform		Ultimate		Impact	
	MM	LBS	N	LBS/ FT ²	N/M ²	LBS	N	LBS	N
CS1000H	600x600x30	1000	4450	480	23000	3000	13360	180	800
CS1250H	600x600x30	1250	5563	689	33000	3750	16700	180	800

Bare Finished CS Panel

Panel	Size	Loading Performance							
		Concentrated		Uniform		Ultimate		Impact	
	MM	LBS	N	LBS/ FT ²	N/M ²	LBS	N	LBS	N
CS1000B	600x600x30	1000	4450	480	23000	3000	13360	180	800
CS1250B	600x600x30	1250	5563	689	33000	3750	16700	180	800

Vinyl Finished CS Panel

Panel	Size	Loading Performance							
		Concentrated		Uniform		Ultimate		Impact	
	MM	LBS	N	LBS/ FT ²	N/M ²	LBS	N	LBS	N
CS1000V	600x600x30	1000	4450	480	23000	3000	13360	180	800
CS1250V	600x600x30	1250	5563	689	33000	3750	16700	180	800

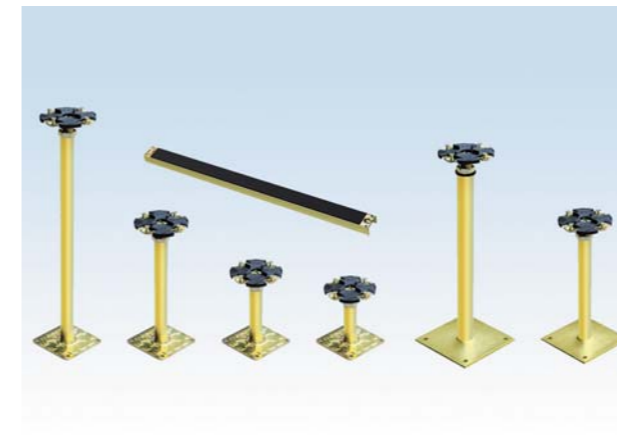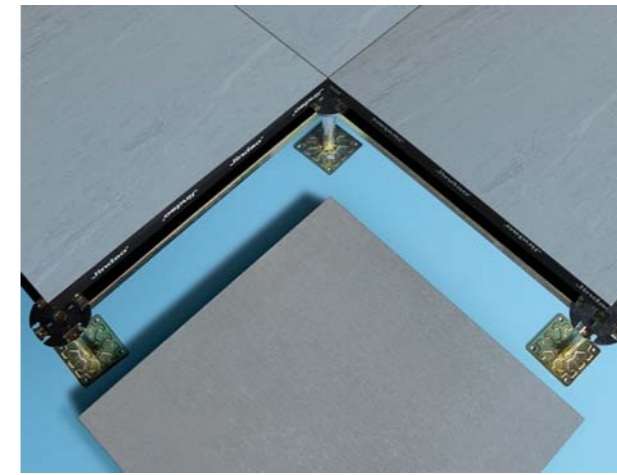

Rigid Grid System

- Designed specifically for computer room, office building
- Excellent acoustics performance

Pedestal & Stringer for Rigid Grid System

- Finished floor heights from 80mm to 1200mm

HPL/Vinyl Finishes

- HPL/Vinyl finishes are available in many colors
- Electrical resistance range of $2.5 \times 10^4 \sim 1 \times 10^6$ ohms or $1 \times 10^8 \sim 2 \times 10^{10}$ ohms

Perforated Panel

- Provide optimum airflow without turbulence
- Provide up to 10% airflow rate